




Nokia 6310i Back Cover Replacement

Opening the phone casing.

Written By: Mustafa

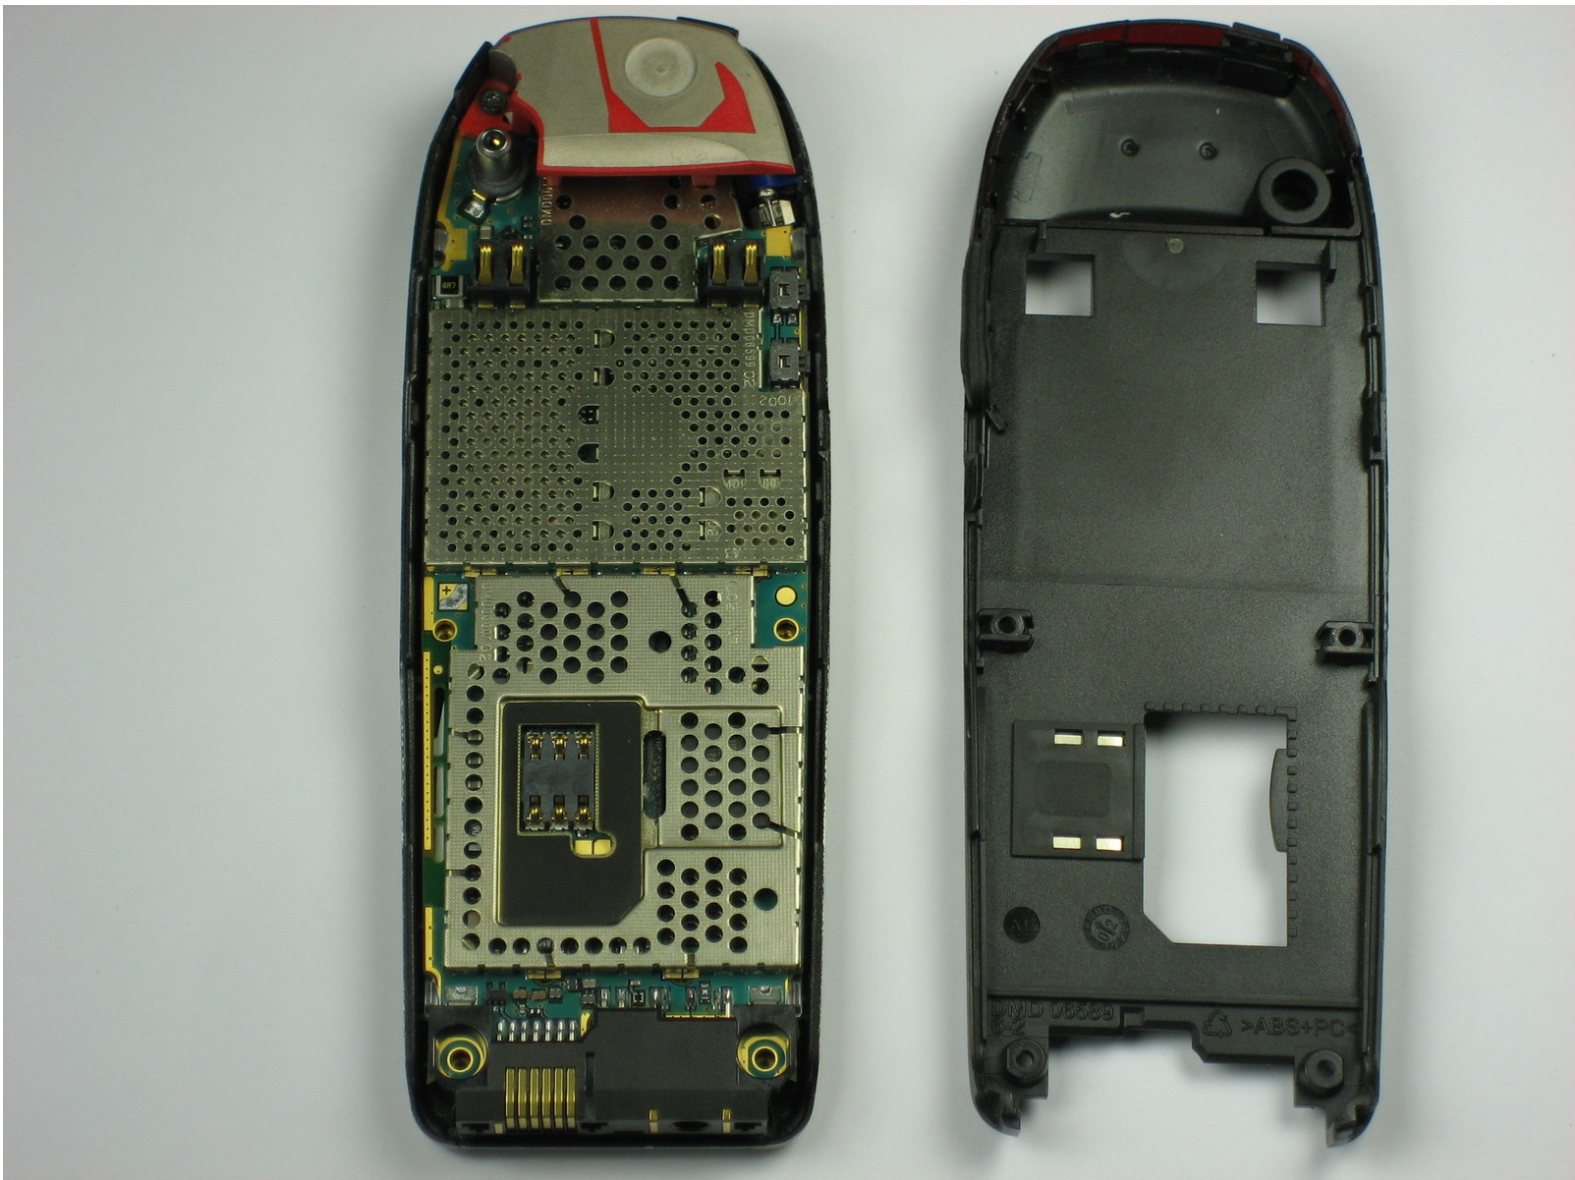



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery




- Press and hold the battery release button and slide the battery away from the Nokia logo


Step 2 — SIM card



- Slide the SIM card lock away from the SIM card.


 The SIM card pops out. Remove the SIM card.

Step 3 — Back Cover

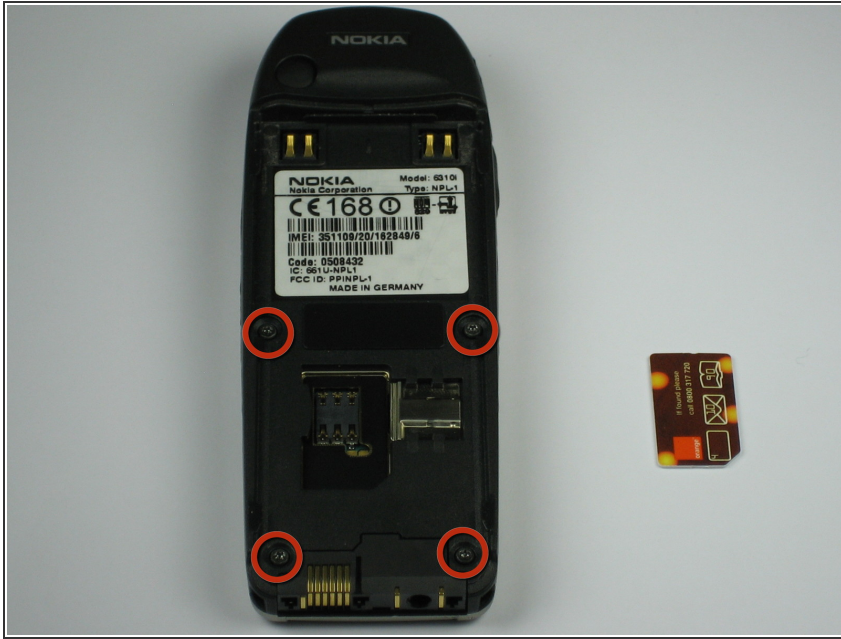

- Unscrew and remove the four T6 Torx screws.

Step 4

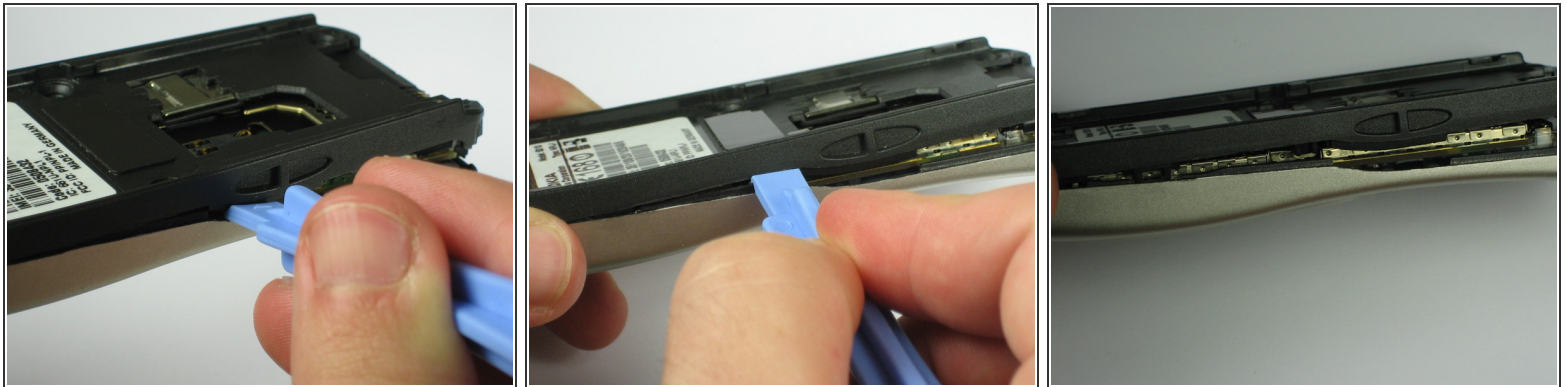

- Insert a plastic opening tool between the faceplate and the black backplate. Gently pry them apart, working from the lower end to the upper side of the phone.

Step 5



- Use the plastic opening tool to separate the top part of the backplate.

i The plastic clips at the top require slightly more force to separate.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-06 09:04:16 AM.